




STORAGE CABINET INSTALLATION INSTRUCTIONS

- Step 1** From the floor plan place the first cabinet in the location as specified on the construction floor plan.
- Step 2** Using the provided leveling legs in each corner of the cabinet, level the cabinet side to side and total length using a 7/16" Socket and Ratchet.
- Step 3** From the floor plan place the second cabinet in the location as specified on the construction floor plan.
- Step 4** Using the provided leveling legs in each corner of the cabinet, level the cabinet side to side and total length using a 7/16" Socket and Ratchet.
- Step 5** From inside the first cabinet place (6) washers on (6) 1/4" X 20 bolts and insert through the first cabinet into the second using the Six clearance holes provided in each cabinet.
- Step 6** From inside the second, cabinet place a washer and a nut onto each bolt protruding into the second cabinet from the first cabinet.
- Step 7** Check the alignment of the sides of both cabinets and when both cabinets are aligned while using a 7/16" wrench or socket hold the nut inside the second cabinet and tighten the bolt inside the first cabinet with a 7/16" Socket and Ratchet. This will secure the two cabinets together.
- Step 8** Using the floor plan continue the installation of the additional cabinets.
- Step 9** Secure the cabinets to the floor by placing a 1/4" bead of clear silicone in the area where the base meets the floor. Allow a minimum of 24 hours for the silicone to cure and secure the cabinets to the floor.



CLEARANCE HOLES FOR
INSTALLATION HARDWARE

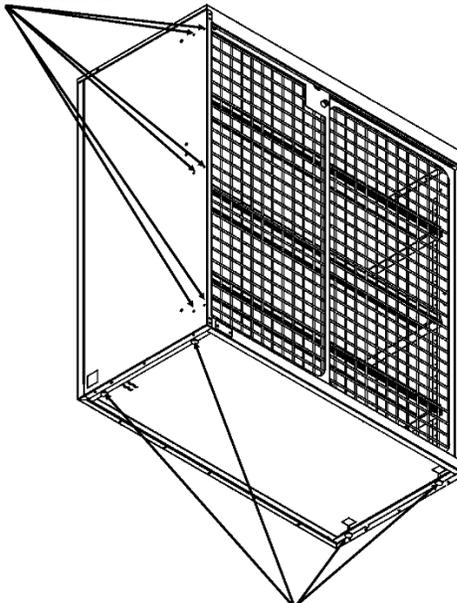

CABINET LEVELERS

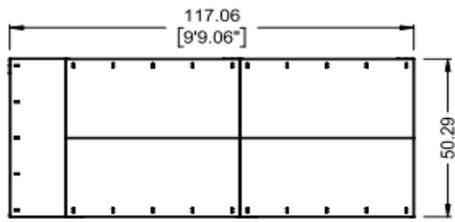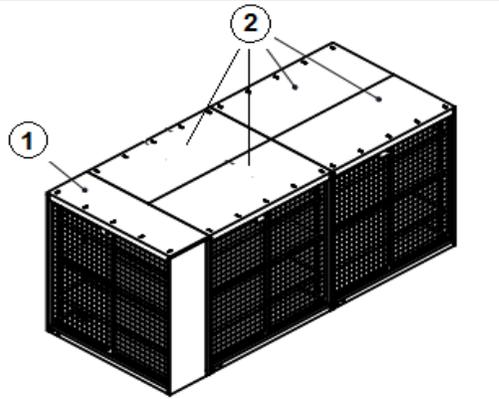

10' Locking Cabinets

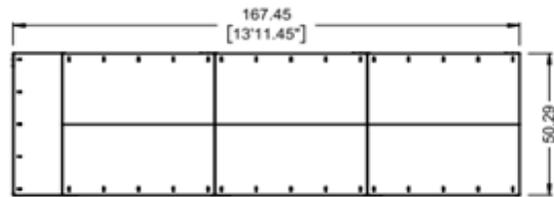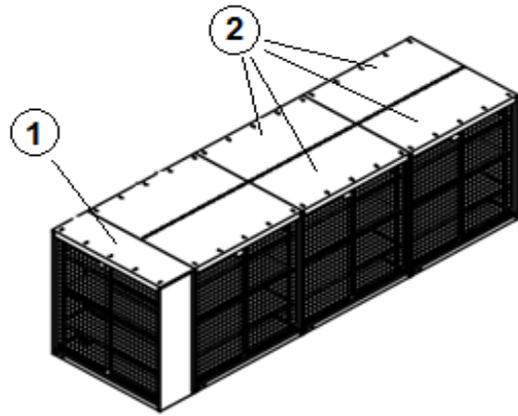

14' Locking Cabinets


Item	WM SAP	Pan-Oston part	QTY
1	100603686	BM-136449-SD	1
2	100603168	BM-136450-SD	4

Item	WM SAP	Pan-Oston part	QTY
1	100603686	BM-136449-SD	1
2	100603168	BM-136450-SD	6

BM-136449-SD SECURITY STORAGE CABINET




Article Number 100603686

ITEM NO.	PART NUMBER	Class/Qty.	DESCRIPTION
1	3781	2	Rivet, Short, 3.26
2	3921	1	Par-O-tion Aluminum Plate
3	3739	4	Leveler, Elevator Bolt 1/4"-20 x 1-1/2 Zinc
4	64448	4	Rivnut, 1/4"-20 Hex
5	105053	6	#6 x 3/8" Blunt Tip Screw, Phillips HD
6	BM-134878	1	Kit, Cabinet Install Hardware
7	BM-136460	1	Cabinet Assy (Weld or Rivet)
8	BM-136466	3	Subassembly, Adjustable Shelf
9	BM-136454	1	Assembly, Suspended Sliding Steel Doors
10	Pallet Assembly-58U-50W	1	Stinger Pallet w/Packaging

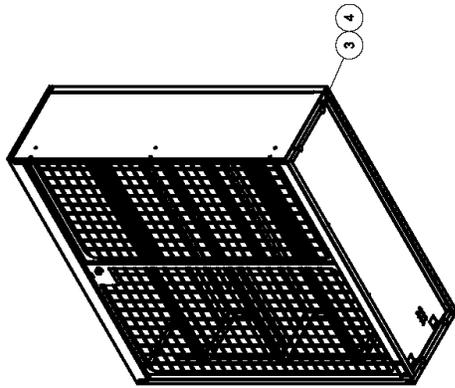

use item# 5 screws to attach shelves to sidewall angles

tape hardware kit to floor, panel or shelf for shipping

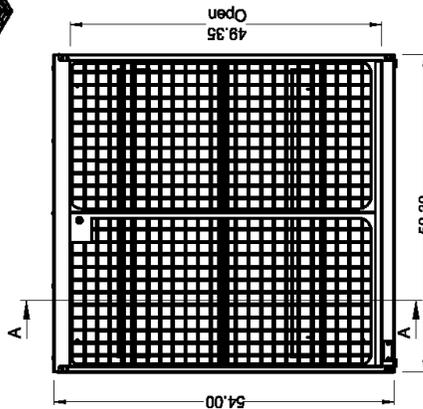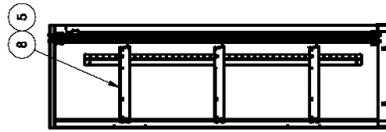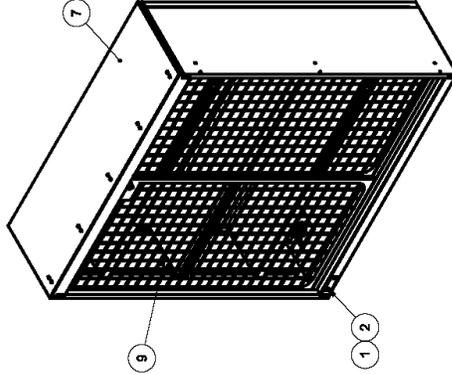

REV #:	1	BRF/DCR #:	2017-077	DATE:	12/2/16	NAME:	K. Hampton
AUTHOR:		Khampton		DRAWING TITLE:			
DATE:		10/11/2010		Assembly, Security Storage Cabinet, Steel Doors			
APPROVED:				DRAWING NUMBER:			
PROJECT FIRST USED:				BM-136449-SD			
REVERSE HAND:				MATERIAL:			
PAINT ZONE:				HOLE TOLERANCE:			
FIRST ANGLE PROJ:				DIMENSION TOLERANCE:			
ANGLE TOLERANCE:				Unless otherwise specified in other quality documents			
SHEET:		1		OF 1			




The contents of this drawing are the exclusive property of Par-O-tion, and are for the use of the customer for whom they were created. Any reproduction or disclosure thereof without the written consent of Par-O-tion, is strictly prohibited.

BM-136450-SD SECURITY STORAGE CABINET

Article Number 100603168

ITEM NO.	PART NUMBER	Close/QTY.	DESCRIPTION
1	109831	4	Rivnut, #8-32, Hex
2	105053	6	#6 x 3/8" Blunt Tip Screw, Phillips HD
3	3739	4	Leveler, Elevator Bolt 1/4"-20 x 1-1/2 Zinc
4	3761	2	Rivet, Short, 3.28
5	3921	1	Pan-Opton Aluminum Plate
6	84448	4	Rivnut, 1/4"-20 Hex
7	BM-194878	1	Kit, Cabinet Install Hardware
8	BM-136451	1	Cabinet Assy (Weld or Rivet)
9	BM-136454	1	Assembly, Suspended Sliding Steel Doors
10	BM-196467	3	Subassembly, Adjustable Shelf
11	Pallet Assembly-50L-30W	1	Stringer Pallet w/Packaging

tape hardware kit to floor panel or shelf for shipping

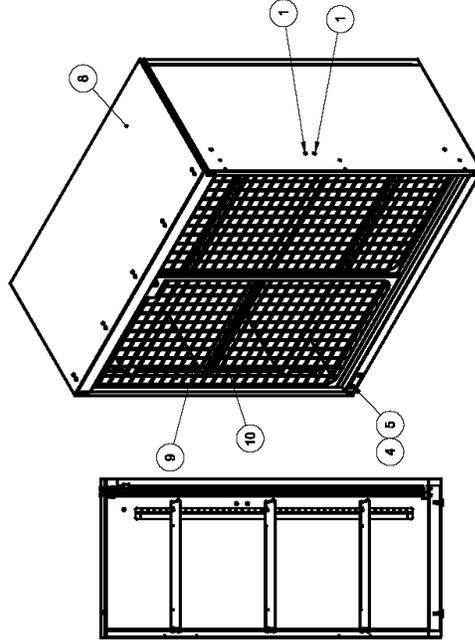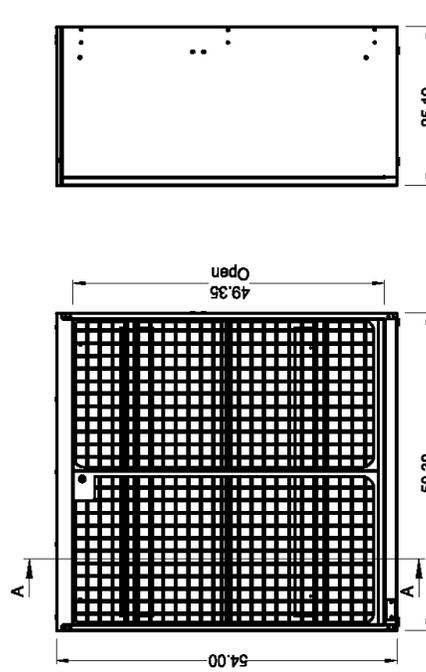
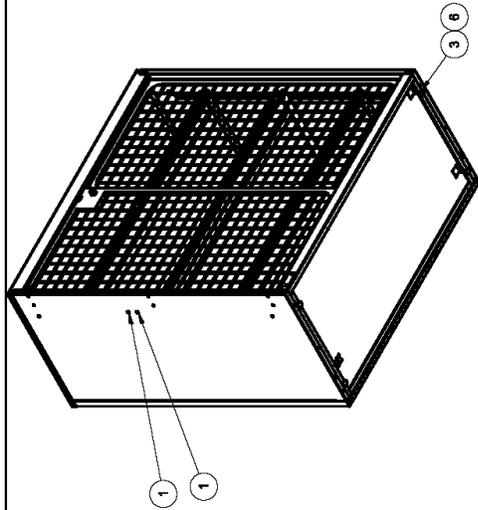


REV #:	1	BRIFDOR #:	2017-0771187	DATE:	12/6/16	NAME:	K. Hampton
AUTHOR:				DRAWING TITLE:			
khampton				Assembly, Deep Security Storage Cabinet, Steel Doors			
DATE:				DRAWING NUMBER:			
10/11/2010				BM-136450-SD			
APPROVED:				PROJECT FIRST USED:			
REVERSE HAND:				MATERIAL:			
PAINT ZONE:				DIMENSION TOLERANCE:			
ANGLE TOLERANCE:				HOLE TOLERANCE:			
FIRST ANGLE PROJ.				SHEET: 1 OF 1			
Pan-Opton				Unless otherwise specified in other quality documents			

The contents of this drawing are the exclusive property of Pan-Opton, and are for the use of the customer for whom they were created. Any reproduction or disclosure thereof without the written consent of Pan-Opton, is strictly prohibited.

BM-134878 CABINET INSTALLATION KIT

ITEM NO.	PART NUMBER	QTY.	DESCRIPTION
1	3732	6	1/4-20 x 3/4 hex hd bolt
2	3804	6	NUT, 1/4-20 Nylon Locknut
3	90360	12	Fender Washer, for 1/4" Screw, 7/8"OD
4	AS-167	1	Packing Slip

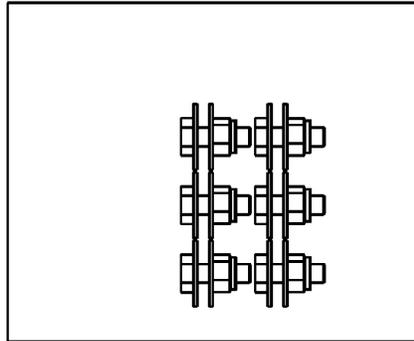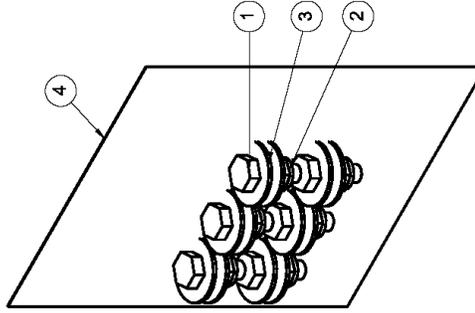

REV#	1	DATE	8/20/15	NAME	KI-Hampton
BRFDCR#	2015-640	DRAWING TITLE	Kit, Cabinet Install Hardware		
AUTHOR		KI-Hampton			
DATE		May 27, 15			
REFERENCE DRAWING		DRAWING NUMBER			
PROJECT FIRST USED		BM-134878			
REVERSE HAND		MATERIAL			
PAINT ZONE		DIMENSION TOLERANCE			
FIRST PRINT		HOLE TOLERANCE			
ANGLE TOLERANCE		Unless otherwise specified in other quality documents			
SHEET		1 OF 1			

The contents of this drawing are the exclusive property of Pan-Opton, and are for the use of the customer for whom they were created. Any reproduction or disclosure without the written consent of Pan-Opton, is strictly prohibited.